


F SERIES

W4-1757SB

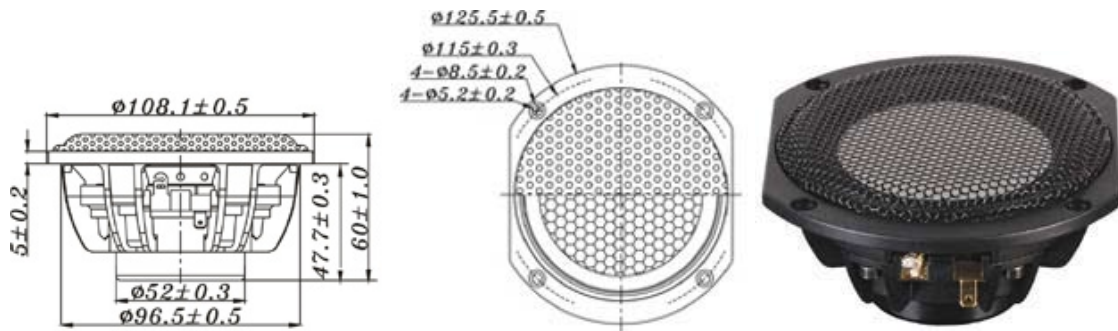

4" SANDWICH FULL RANGE

- FLAT ALUMINUM SANDWICH CONE
DURABLE FOAM RUBBER SURROUND
- 38mm OF VC
- SHALLOW DESIGN
- NEODYMIUM MAGNET, SHIELDED
- THE WIDEST DISPERSION OF OFF-AXIS
FREQUENCY RESPONSE
- LOW THD DESIGN



DIAPHRAGM MTL	Sandwich
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	6 W
DCR IMPEDANCE	5.6 W
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	75-20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	11 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	4.51 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	4.99 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	907.479 μMN^{-1}
EFFEC.PISTON AREA	0.0057 M^2
Levc	0.019 mH
Zo	17 ohm
X-max	3 mm
Vas	4.19 Litr.
Qts	0.46
Qms	1.55
Qes	0.65



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE